
Mohawk Group

Iconic Earth Collection Mohawk Group





Rugged Range Quickship Available

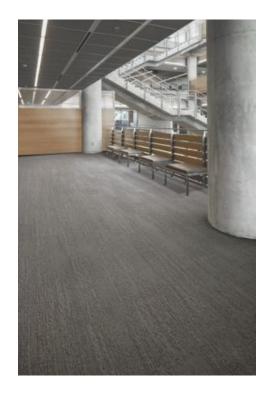

Classic Ridge Quickship Available



Perfect Paths

Quickship Available

883

Quickship Available

Wild Terrain



Downing Stone Quickship Available



Quickship Available

Solid Ground Clean Slate Quickship Available Quickship Available

862

Canyon Clay



Daring Drift Quickship Available

DESIGN

Tufted Pile Weight: 16.0 oz. per sq. yd. (542 g/m2)

Product Type: Tile Construction: Tufted Minimum Sq. Yd.: No Minimum

Surface Texture: **Textured Patterned Loop** 1/12 (47.00 rows per 10 cm) Gauge:

Density: 7,200 116,640 Weight Density:

Stitches Per Inch: 11.0 (43.31 per 10 cm) Finished Pile Thickness: .081" (2.05 mm) Dye Method: Solution Dyed **EcoFlex ICT** Backing Material:

Fiber Type: Colorstrand® SD Nylon

Pattern Repeat: Not Applicable

Size: 12" x 36" (.3048 m x .9144 m)

Monolithic, Half Lap, Brick Ashlar, Basket Weave, Plank Half Lap, Monolithic Stepping, Random, Installation Method:

Herringbone

Stain Release Technology: Sentry Plus Stain Protection Soil Release Technology: Sentry Soil Protection

Foot Traffic Recommendation TARR: Heavy

SUSTAINABILITY

IAQ Green Label Plus: CRI Green Label Plus GLP1098

Pre-Consumer Recycled Content:

NSF 140: EcoFlex ICT - NSF 140 Gold

Declare Label: Declared

PERFORMANCE

AATCC-134 Under 3.5 KV Static: Flammability: ASTM E 648 Class 1 (Glue Down) Smoke Density: ASTM E 662 Less than 450

SERVICE

Lifetime Limited Carpet Tile Warranty, Lifetime Limited Colorfastness to Light, 10 Year Limited Warranties Colorfastness to Atmospheric Contaminants, 10

Year Limited Stain Warranty, Lifetime Static