



DESIGN

Product Type:	Floating LVT
Gauge:	.16" (4 mm)
Wear Layer:	20 mil
Finish:	M-Force Enhanced Urethane
Edge Profile:	Microbevel
Size:	7"x48" (nominal)
Surface Profile:	Wood Emboss
Anti-Microbial:	Yes
Installation:	Floating with Uniclic Locking System
Recommended Adhesive:	None Required
Square Feet Per Carton:	22.14 sf/ctn (2.05 m ² /ctn)
Pieces Per Carton:	10 pcs/ctn
Pounds per carton:	25.13 lbs/ctn (11.39 kg/ctn)
Underlayment:	Mohawk ActiveSound
Underlayment Adhesive:	Mohawk M950, M700 or Mohawk's MS160 spray adhesive

PERFORMANCE


Construction:	Commercial Grade Floating Resilient Tile
Classification:	ASTM F1700 - Class III, Type A - Smooth, Type B - Embossed
Smoke Density:	ASTM E662 - Passes - < 450 (non-flaming)
Squareness:	ASTM F2055 - Passes - 0.010 in. max
Size and Tolerance:	ASTM F2055 - Passes - ±0.016 in. per linear foot
Dimensional Stability:	ASTM F2199 - Passes - 0.15% max (0.020 in. per linear foot)
Thickness:	ASTM F386 - Passes - 0.157±0.005 in. (4.0±0.13mm)
Flexibility:	ASTM F137 - Passes - ≤ 1.0 in., no cracks or breaks
Static Load:	ASTM F970 - Passes, modified - 1000 psi
Residual Indentation:	ASTM F1914 - Passes - Average less than 8%
Slip Resistance:	ASTM D2047 - Passes - > 0.6 Wet, 0.6 Dry
Resistance To Chemicals:	ASTM F925 - Passes - No Change or Slight Change
Resistance To Heat:	ASTM F1514 - Passes - ΔE ≤ 5
Resistance To Light:	ASTM F1515 - Passes - ΔE ≤ 5
Critical Radiant Flux:	ASTM E648 - Passes - Minimum 0.7 Watt

SUSTAINABILITY


Rapidly Renewable Resource Content:	0%
Certification:	FloorScore® Certified

SERVICE

Warranties:	Limited 10 Year Commercial
-------------	----------------------------

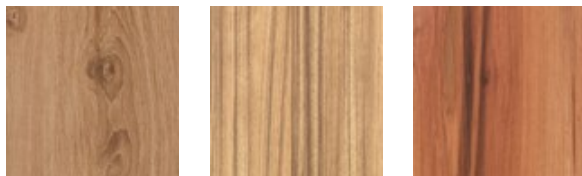

243 Tavern 258 Light Rail 332 Trolley

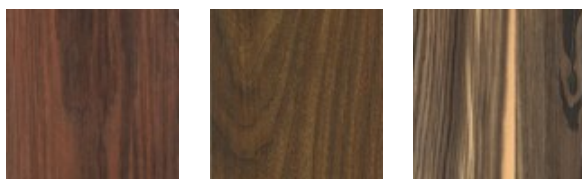

378 State House 786 Boulevard 851 Refraction



879 Warehouse 848 Industrial 811 White Noise

Clic Step 20 mil Collection



923
Row House




929
Skyscraper



934
Tracks



948
Loft



999
Wrought Iron