



DESIGN

Product Type:	Glue Down LVT
Gauge:	.10" (2.5mm)
Wear Layer:	12 mil (0.3mm)
Finish:	M-Force Enhanced Urethane
Surface Profile:	Wood Emboss
Size:	6"W x 48"L (152.4 mm x 1219.2 mm)
Square Feet Per Carton:	36 sf/ctn (3.34 m ² /ctn)
Pieces Per Carton:	18 pieces/ctn
Pounds per carton:	34.17 lbs/ctn (15.49 kg/ctn)
Installation Method:	Glue Down
Recommended Adhesive:	Mohawk M95.0 Resilient Flooring Adhesive, MS160 Spray, M700 Pressure Sensitive Adhesive
Underlayment:	Mohawk Accusound

PERFORMANCE


Construction:	Light Commercial Grade Resilient Tile
Classification:	ASTM F1700 - Class III, Type A - Smooth, Type B - Embossed
Squareness:	ASTM F2055 - Passes - ±0.010 in. max
Size and Tolerance:	ASTM F2055 - Passes - ±0.024 in. per linear foot
Thickness:	ASTM F386 - Passes - ±0.005 in.
Flexibility:	ASTM F137 - Passes - ≤ 1.0 in., no cracks or breaks
Dimensional Stability:	ASTM F2199 - Passes - 6hrs@180F, 0.12%
Static Load:	ASTM F970 - Passes, modified - 1500 psi
Residual Indentation:	ASTM F1914 - Passes - Average less than 8%
Slip Resistant:	ASTM D2047 - Passes - > 0.6 Wet, 0.6 Dry
Resistance To Chemicals:	ASTM F925 - Passes - No Change or Slight Change
Resistance To Light:	ASTM F1515 - Passes - ΔE ≤ 8
Resistance To Heat:	ASTM F1514 - Passes - ΔE ≤ 8
Critical Radiant Flux:	ASTM E648 - Passes - ≥ 0.45 watts/cm ² , Class 1
Smoke Density:	ASTM E662 - Passes

SUSTAINABILITY

Certification:	FloorScore® certified
----------------	-----------------------

SERVICE

Warranties:	Limited 10 Year Commercial
-------------	----------------------------

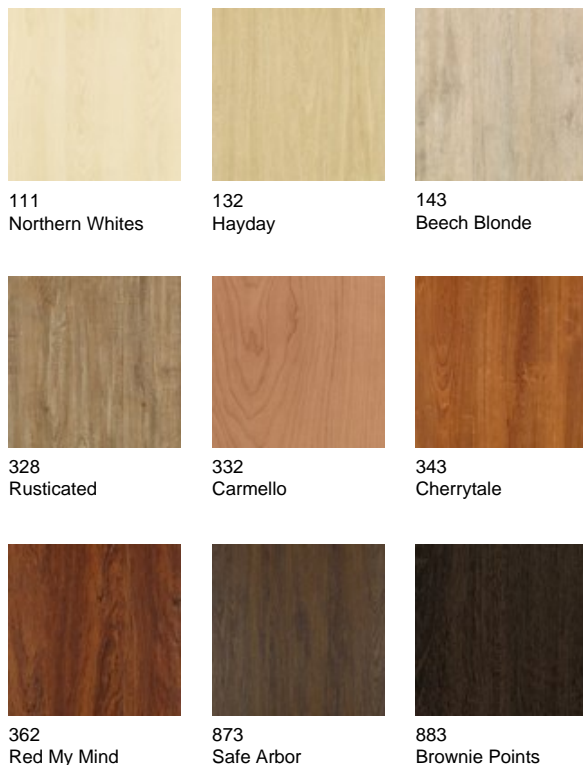



921
Shore Thing



933
Silver Fox



959
Grey Matters