



## DESIGN

Product Type:	Glue Down LVT
Gauge:	.10" (2.5 mm)
Wear Layer:	20 mil
Finish:	M-Force Enhanced Urethane
Edge Profile:	Microbevel
Size:	18" x 36" (457.2 mm x 914.4 mm)
Surface Profile:	Light Emboss
Anti-Microbial:	No
Installation:	Glue Down
Recommended Adhesive:	M950 Acrylic, MS160 Spray, M700 Pressure Sensitive Adhesive
Square Feet Per Carton:	40.5 sf/ctn (3.76 m <sup>2</sup> /ctn)
Pieces Per Carton:	9 pcs/ctn
Pounds per carton:	38.18 lbs/ctn (17.31 kg/ctn)
Underlayment:	Mohawk Accusound
Underlayment Adhesive:	Mohawk M950, M700 or Mohawk's MS160 spray adhesive

## PERFORMANCE

Construction:	Commercial Grade Resilient Tile
Classification:	ASTM F1700 - Class III, Type A - Smooth, Type B - Embossed
Smoke Density:	ASTM E662 - Passes
Squareness:	ASTM F2055 - Passes - 0.010 in. max
Size and Tolerance:	ASTM F2055 - Passes - ±0.016 in. per linear foot
Dimensional Stability:	ASTM F2199 - Passes - ≤ 0.024 in. per linear foot
Thickness:	ASTM F386 - Passes - Nominal ±0.005 in.
Static Load:	ASTM F970 - Passes, modified - 1500 psi
Residual Indentation:	ASTM F1914 - Passes - Average less than 8%
Slip Resistance:	ASTM D2047 - Passes - > 0.6 Wet, 0.6 Dry
Resistance To Chemicals:	ASTM F925 - Passes - No Change or Slight Change
Resistance To Heat:	ASTM F1514 - Passes - ΔE ≤ 8
Resistance To Light:	ASTM F1515 - Passes - ΔE ≤ 8
Critical Radiant Flux:	ASTM E648 - Passes - ≥ 0.45 watts/cm <sup>2</sup> , Class 1

## SUSTAINABILITY


Biobased Material Content:	0%
Rapidly Renewable Resource Content:	0%
Certification:	FloorScore® Certified

## SERVICE

Warranties:	Limited 10 Year Commercial
-------------	----------------------------



233 Playa      926 Frost      326 Illumen

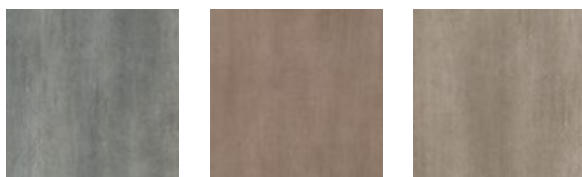

663 Lagoon      372 Fossil      342 Clay



888 Coffee      928 Galena      985 Iguazu



999  
Hot Stone